


BALL VALVES

128 3-way ball valve

INSTALLATION

T valve operation: with the handle disassembled is visible, on the stem, a T mark, which indicates the running direction of the ball's holes, allowing the following combinations:


Fig. A

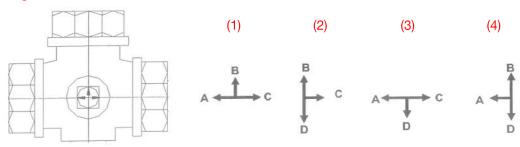

- 1 The flow go in all directions (A-B-C)
- 2 The flow go only from B to C (or vice versa)
- 3 The flow go only from A to C (or vice versa)
- 4 The flow go only from A to B (or vice versa)

L valve operation: with the handle disassembled is visible, on the stem, a L mark, which indicates the running direction of the ball's holes, allowing the following combinations:

Fig. B



(1)



(3)

(4)

L, c

r c





- 1 The flow go from B to C (or vice versa)
- 2 The flow is stopped
- 3 The flow is stopped
- 4 The flow go from A to B (or vice versa)

